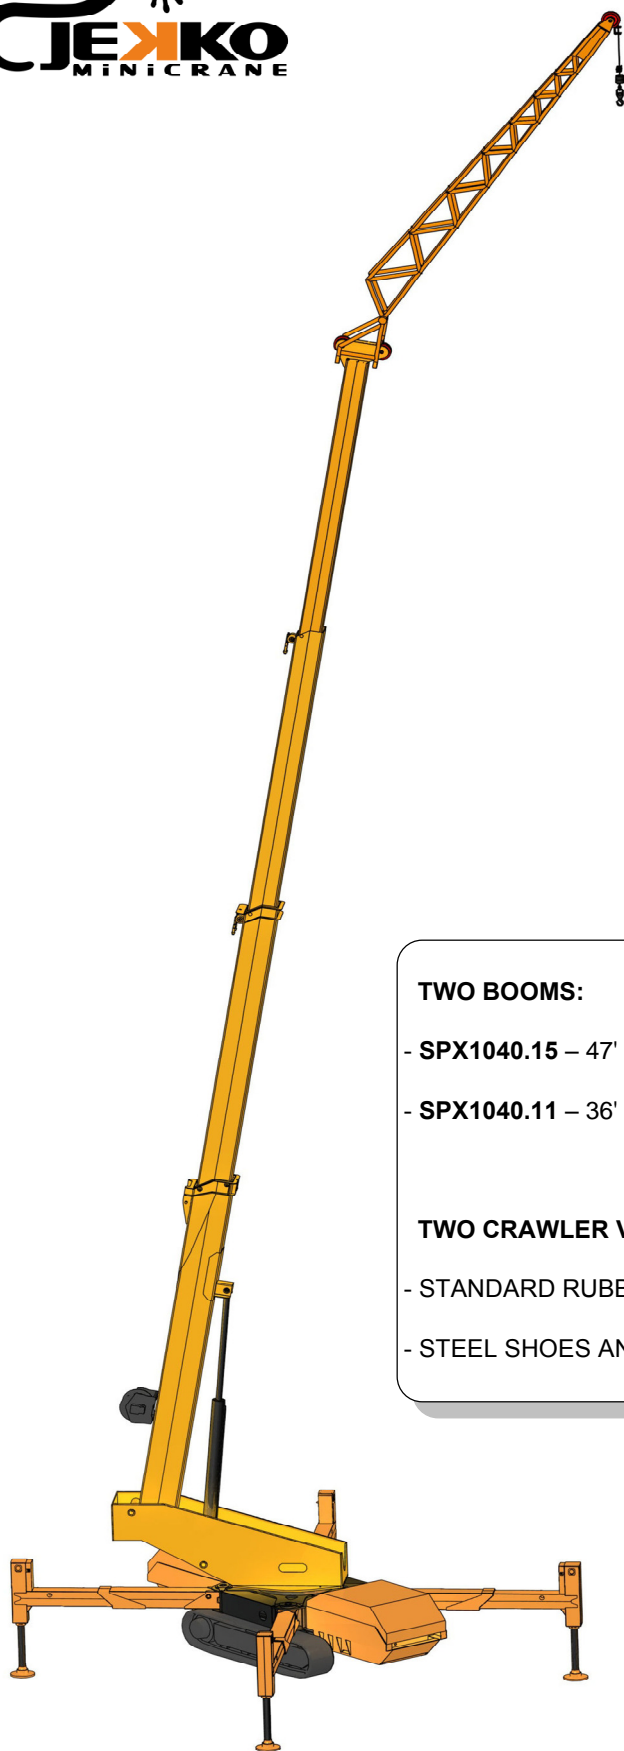




SPX 1000



TWO BOOMS:

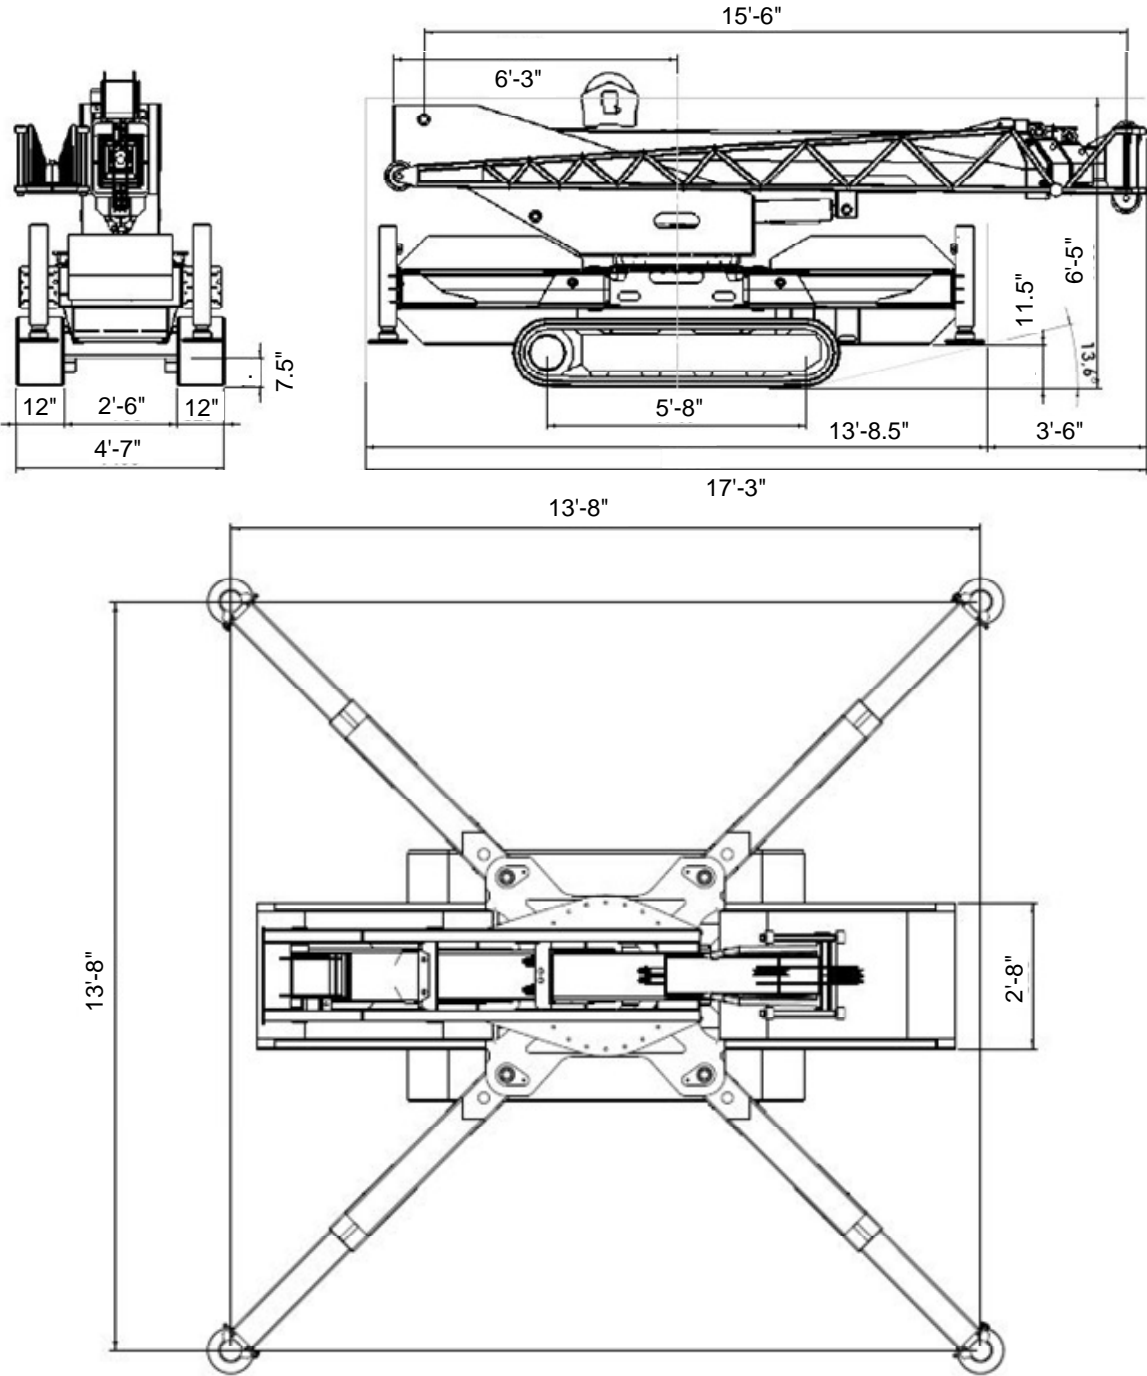
- SPX1040.15 – 47' 6" AND THREE HYDRAULIC SECTIONS
- SPX1040.11 – 36' 0" AND TWO HYDRAULIC SECTIONS

TWO CRAWLER VERSIONS:

- STANDARD RUBBER, 4' 7" WIDTH
- STEEL SHOES AND EXTENDABLE, 4' 9" TO 6' 8" WIDTH

LIFT ANYWHERE YOU NEED!

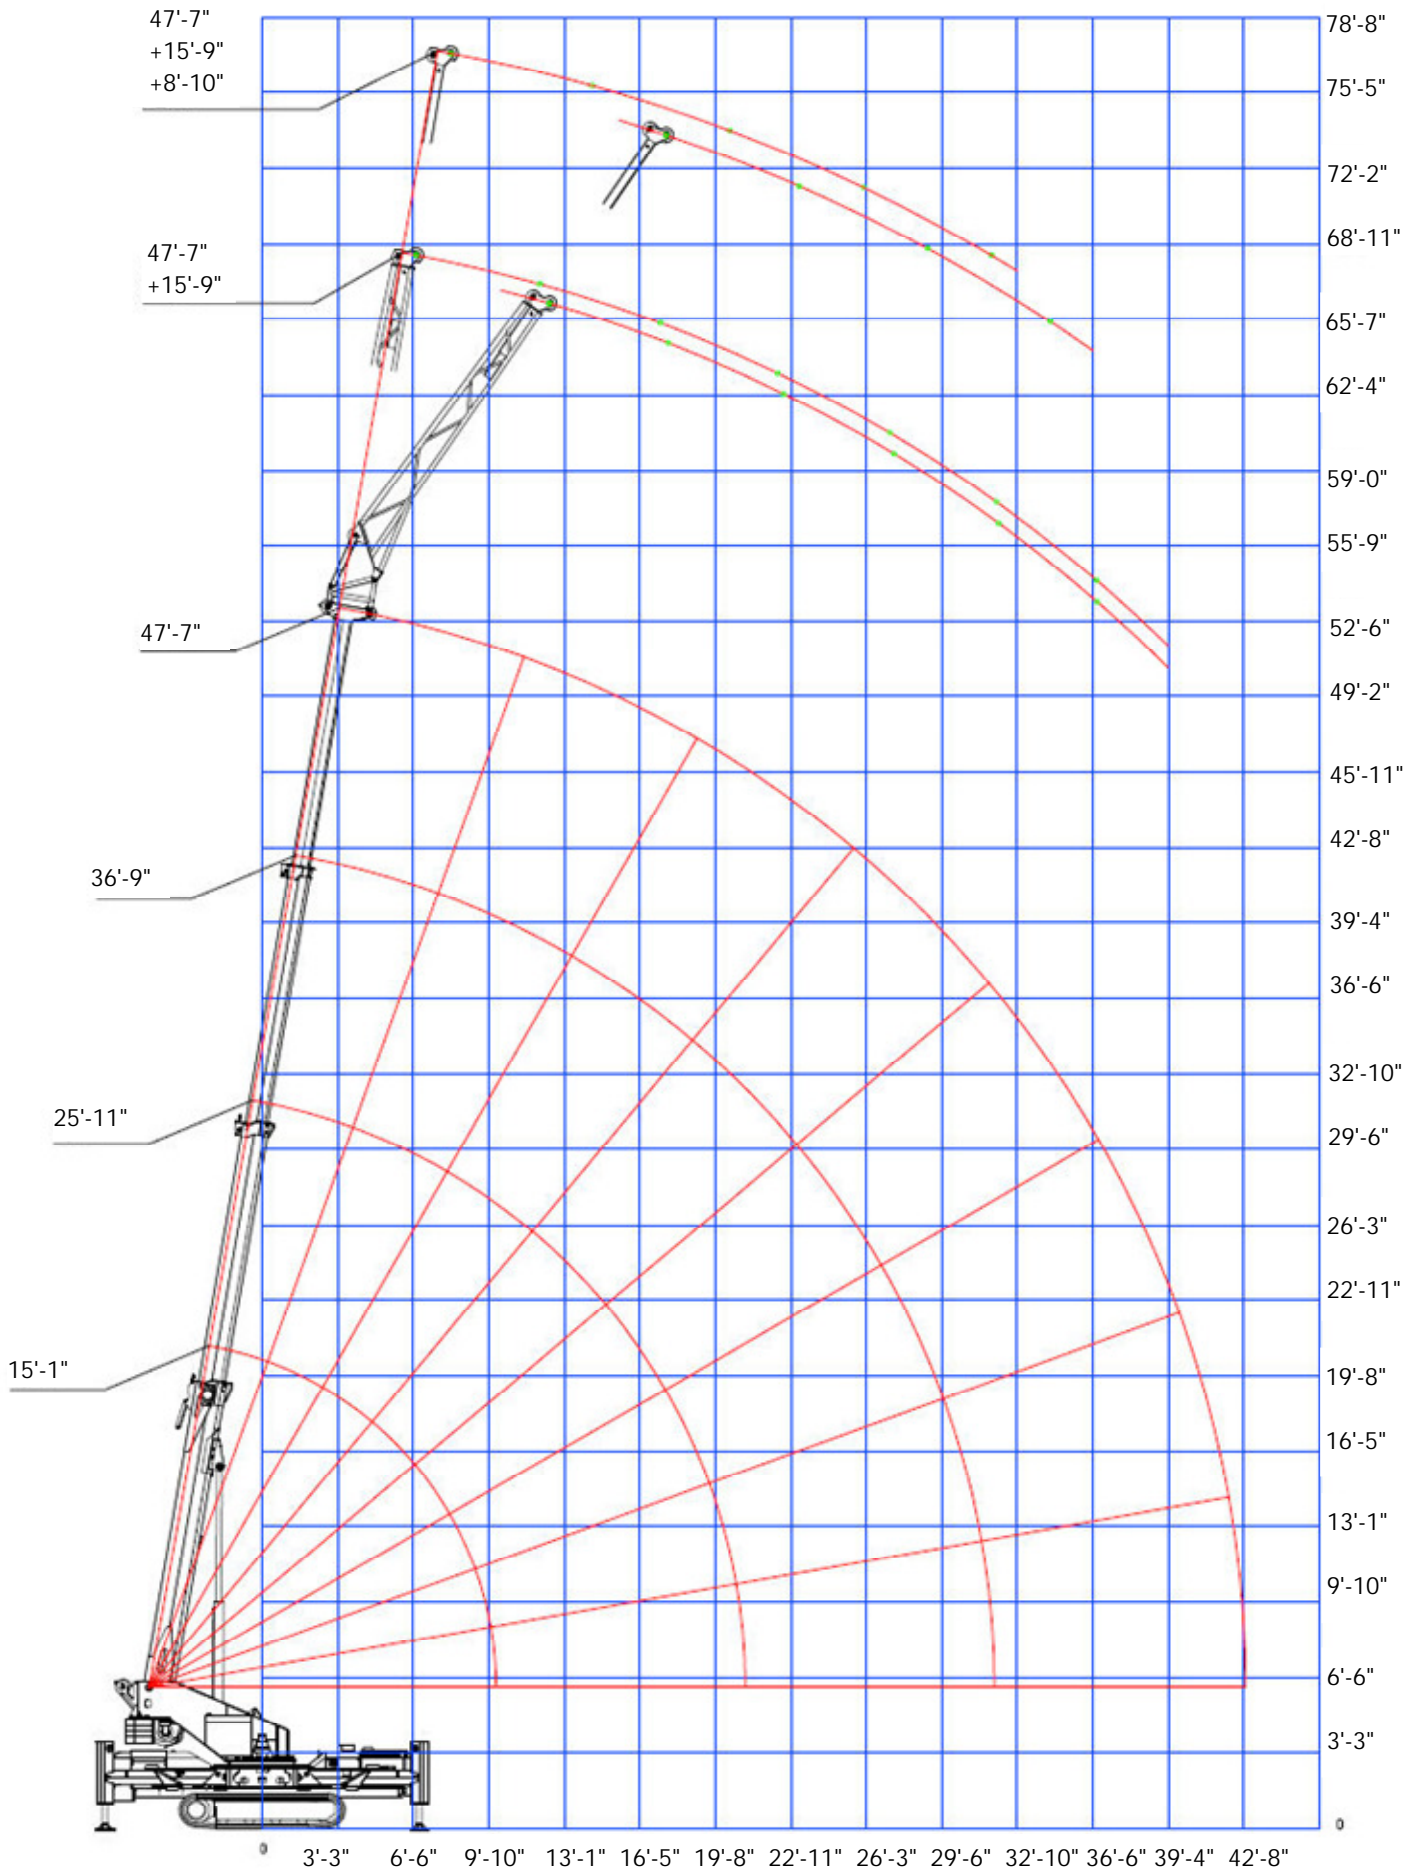
SPX1040.15 – OVERALL DIMENSIONS



Crane Less Counterweight	11,025
Counterweight	1,543
4 ton Block	
15' 9" Lattice Jib + 8' 10" Stinger	

DRAFT₂ COPY







SPX1040.15 – WORKING RANGE CHART









DRAFT ₃ **COPY**

SPX1040.15 – RATED LOAD CAPACITY

(POUNDS)






	 13' 8" x 13' 8"		 14' 9" - 47' 7"				 -			 1,543		 360°	
	14' 9"	18' 0"	21' 3"	24' 7"	27' 11"	31' 2"	34' 5"	37' 9"	41' 0"	44' 3"	47' 7"		
	6' 6"	8800	8160	7700	7275	6170	5730	5290	4630	4190	4080	3970	
9' 10"	5950	6600	6830	6170	5730	5070	4400	4190	3970	3860	3748		
13' 1"		4850	5070	4630	4400	4190	3970	3748	3527	3415	3085		
16' 5"			3970	3970	3748	3527	3527	3085	2645	2535	2535		
19' 8"				3300	3527	3300	3085	2865	2645	2425	2200		
22' 11"					2865	2865	2865	2645	2200	2200	2200		
26' 3"						2425	2645	2425	2200	1985	1985		
29' 6"							1985	1985	1870	1760	1760		
32' 10"								1760	1650	1540	1540		
36' 6"									1430	1430	1320		
39' 4"										1200	1200		
42' 8"											1100		







	 9' 10" x 9' 10"		 14' 9" - 47' 7"				 -			 1543		 360°	
	14' 9"	18' 0"	21' 3"	24' 7"	27' 11"	31' 2"	34' 5"	37' 9"	41' 0"	44' 3"	47' 7"		
	6' 6"	8800	7275	6170	5070	3748	2865	2095	1870	-	-	-	
9' 10"	5950	5950	5510	4300	3415	2535	1760	1650	-	-	-		
13' 1"		4400	4080	3300	2645	2095	1540	1430	-	-	-		
16' 5"			3195	2755	2200	1760	1430	1200	-	-	-		
19' 8"				2315	2095	1650	1200	1100	-	-	-		
22' 11"					1760	1430	1100	990	-	-	-		
26' 3"						1200	990	880	-	-	-		
29' 6"							770	770	-	-	-		
32' 10"								660	-	-	-		
									-	-	-		
										-	-		
											-		

DRAFT ⁴ **COPY**

SPX1040.15 – RATED LOAD CAPACITY

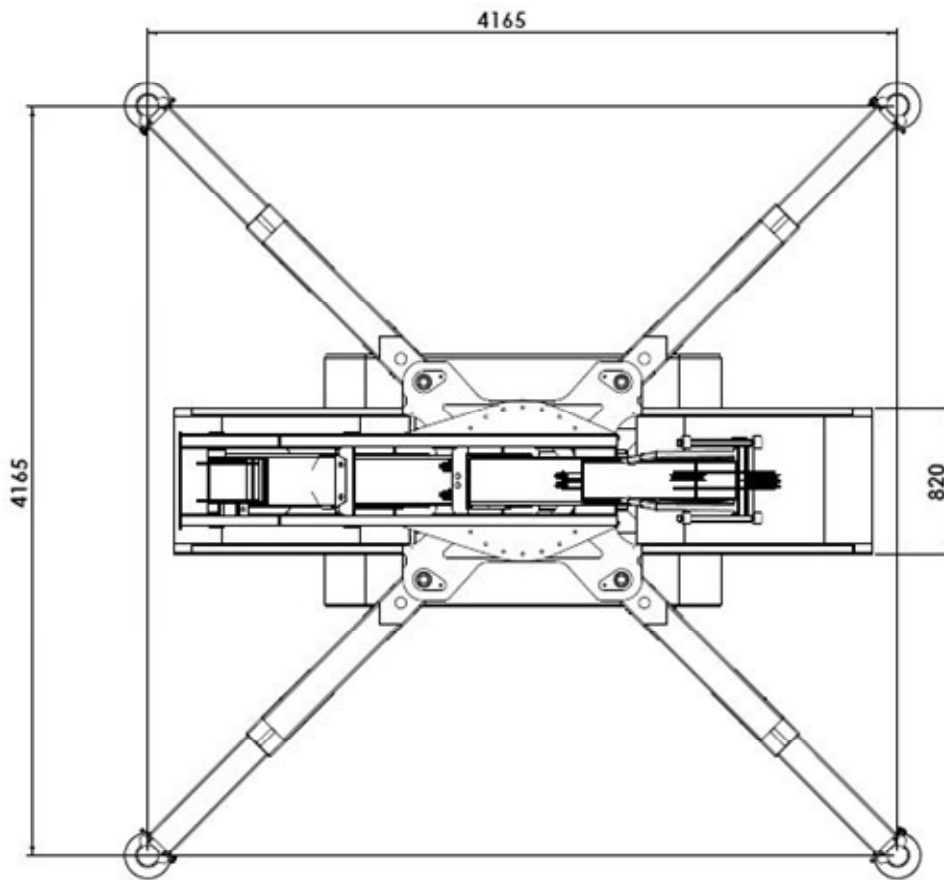
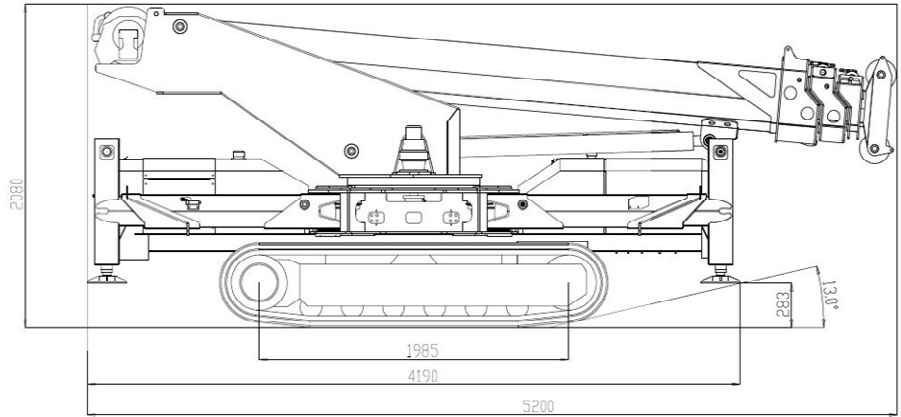
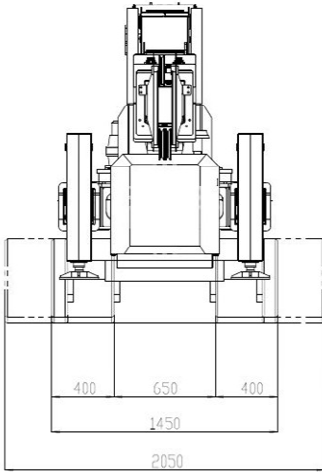
(POUNDS)

	 4' 7"		 14' 9" - 47' 7"				-		 1543		 0°	
	14' 9"	18' 0"	21' 3"	24' 7"	31' 2"	34' 5"	34' 5"	37' 9"	41' 0"	44' 3"	47' 7"	
	6' 6"	2200	2200	2200	1430	660	-	-	-	-	-	-
9' 10"	2200	2200	1985	1200	550	-	-	-	-	-	-	
13' 1"		1985	1540	880	440	-	-	-	-	-	-	
16' 5"			1200	770	330	-	-	-	-	-	-	
19' 8"				660	330	-	-	-	-	-	-	
22' 11"					220	-	-	-	-	-	-	
8,0						-	-	-	-	-	-	
9,0							-	-	-	-	-	
10,0								-	-	-	-	
11,0									-	-	-	
12,0										-	-	
13,0											-	

	 13' 8" x 13' 8"		 14' 9" - 47' 7"		 15' 9" - 8' 10"		 1543		 360°	
	15' 9"	15' 9"	15' 9"	15' 9"						
		0	0	8' 10"	8' 10"					
	0°	25°	0°	25°						
80	2200	2200	1760	1430						
75	2200	1985	1760	1100						
70	1985	1540	1540	880						
65	1760	1100	1100	660						
60	1540	880	880							
55	1100	660								
50	770			0						

DRAFT ⁵ **COPY**

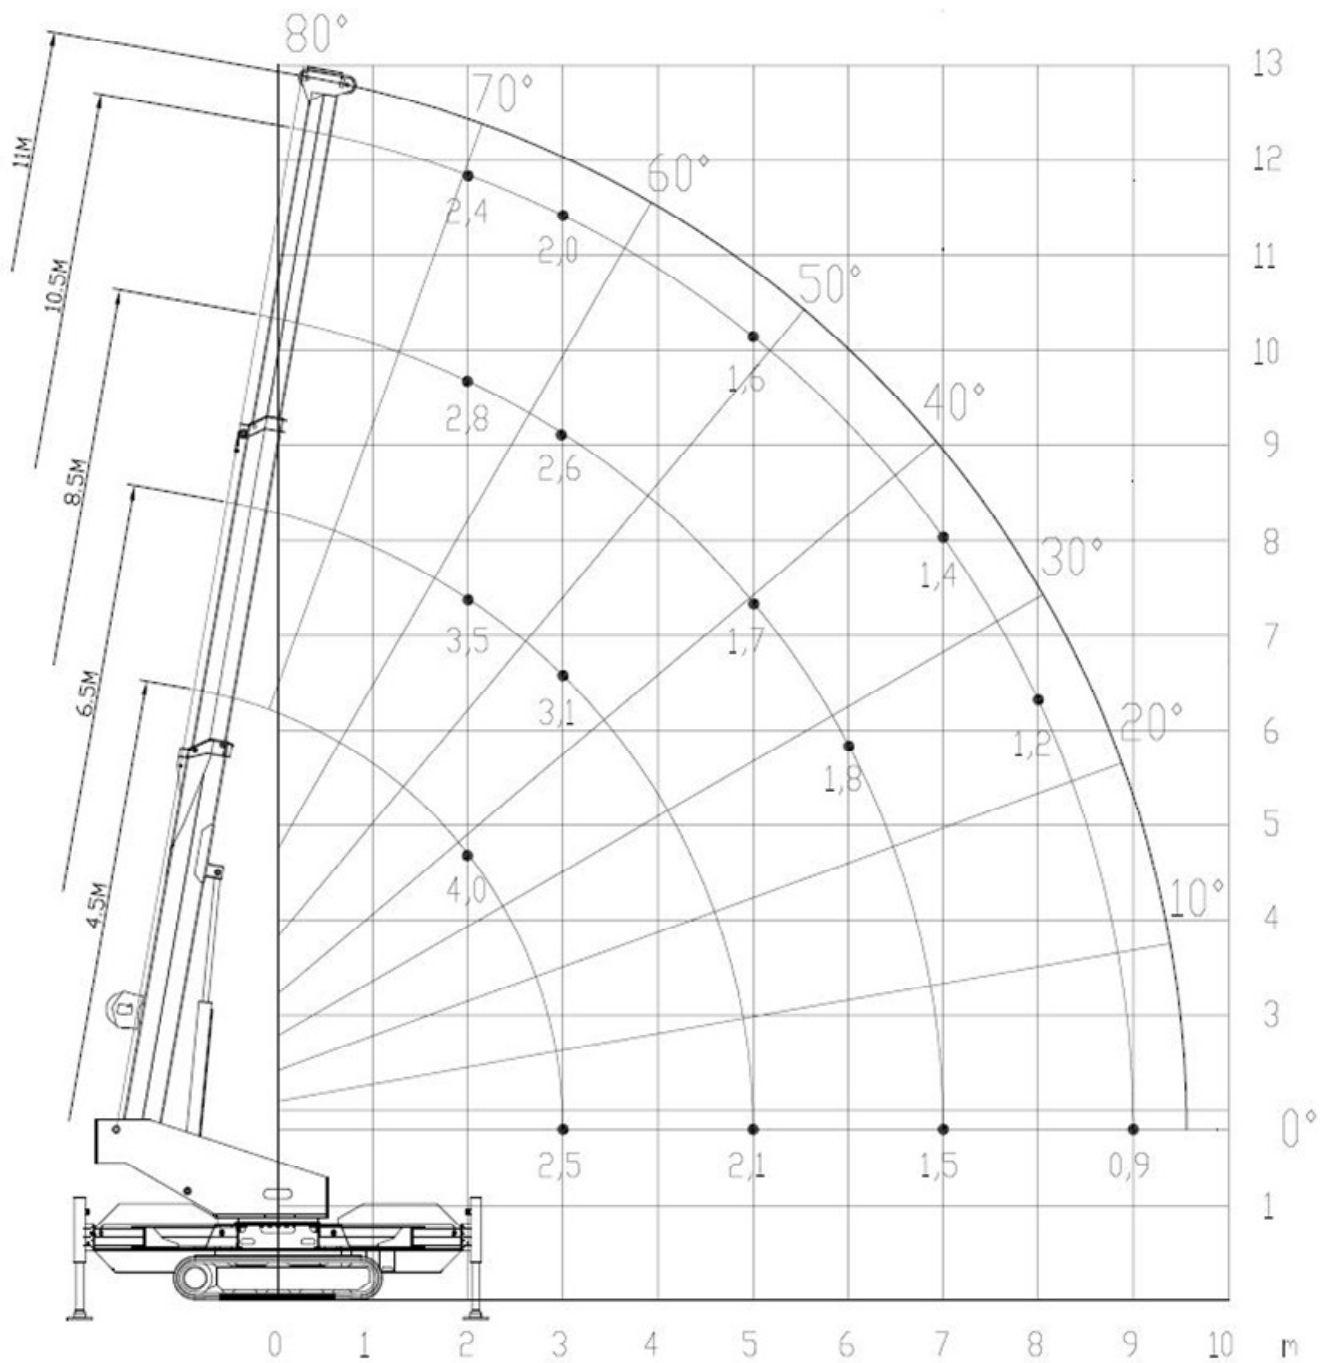
SPX1040.11A – OVERALL DIMENSIONS



DRAFT⁶ **COPY**

SPX1040.11A – WORKING RANGE CHART







(2 SECTION BOOM)









DRAFT COPY

SPX1040.11A – RATED LOAD CAPACITY

(METRIC TONS)







												
	4,2x4,2 m		4,5-11,0 m				-		1000 kg		360°	
	4,5 m	5,5 m	6,5 m	7,5 m	8,5 m	9,5 m	10,5 m	11,5 m	12,5 m	13,5 m	14,5 m	
2,0	4.00	3.70	3.50	3.30	2.80	2.60	2.40	-	-	-	-	
3,0	2.70	3.00	3.10	2.80	2.60	2.30	2.00	-	-	-	-	
4,0		2.20	2.30	2.10	2.00	1.90	1.80	-	-	-	-	
5,0			1.80	1.80	1.70	1.60	1.60	-	-	-	-	
6,0				1.50	1.60	1.50	1.40	-	-	-	-	
7,0					1.30	1.30	1.30	-	-	-	-	
8,0						1.10	1.20	-	-	-	-	
9,0							0.90	-	-	-	-	
10,0								-	-	-	-	
11,0								-	-	-	-	
12,0								-	-	-	-	
13,0								-	-	-	-	

												
	3,0x3,0 m		4,5-11,0 m				-		1000 kg		360°	
	4,5 m	5,5 m	6,5 m	7,5 m	8,5 m	9,5 m	10,5 m	11,5 m	12,5 m	13,5 m	14,5 m	
2,0	4.00	3.30	2.80	2.30	1.70	1.30	0.95	-	-	-	-	
3,0	2.70	2.70	2.50	1.95	1.55	1.15	0.80	-	-	-	-	
4,0		2.00	1.85	1.50	1.20	0.95	0.70	-	-	-	-	
5,0			1.45	1.25	1.00	0.80	0.65	-	-	-	-	
6,0				1.05	0.95	0.75	0.55	-	-	-	-	
7,0					0.80	0.65	0.50	-	-	-	-	
8,0						0.55	0.45	-	-	-	-	
9,0							0.35	-	-	-	-	
10,0								-	-	-	-	
11,0								-	-	-	-	
12,0								-	-	-	-	
13,0								-	-	-	-	







DRAFT ⁸ COPY

SPX1040.11A – RATED LOAD CAPACITY

(METRIC TONS)


	 1,45 m (*)		 4,5-11,0 m				 -		 1000 kg		 0°	
	4,5 m	5,5 m	6,5 m	7,5 m	8,5 m	9,5 m	10,5 m	11,5 m	12,5 m	13,5 m	14,5 m	
	2,0	3,0	4,0	5,0	6,0	7,0	8,0	9,0	10,0	11,0	12,0	13,0
	2.40	1.85	1.40	1.00	0.55	-	-	-	-	-	-	-
	1.60	1.50	1.25	0.85	0.50	-	-	-	-	-	-	-
		1.10	0.90	0.60	0.40	-	-	-	-	-	-	-
			0.70	0.55	0.35	-	-	-	-	-	-	-
				0.45	0.30	-	-	-	-	-	-	-
					0.25	-	-	-	-	-	-	-
						-	-	-	-	-	-	-
							-	-	-	-	-	-
								-	-	-	-	-
									-	-	-	-
										-	-	-
											-	-

(*) Solo con cingolo lungo in acciaio

	 2,05 m (*)		 4,5-11,0 m				 -		 1000 kg		 8°	
	4,5 m	5,5 m	6,5 m	7,5 m	8,5 m	9,5 m	10,5 m	11,5 m	12,5 m	13,5 m	14,5 m	
	2,0	3,0	4,0	5,0	6,0	7,0	8,0	9,0	10,0	11,0	12,0	13,0
	2.40	1.85	1.40	1.00	0.55	-	-	-	-	-	-	-
	1.60	1.50	1.25	0.85	0.50	-	-	-	-	-	-	-
		1.10	0.90	0.60	0.40	-	-	-	-	-	-	-
			0.70	0.55	0.35	-	-	-	-	-	-	-
				0.45	0.30	-	-	-	-	-	-	-
					0.25	-	-	-	-	-	-	-
						-	-	-	-	-	-	-
							-	-	-	-	-	-
								-	-	-	-	-
									-	-	-	-
										-	-	-
											-	-


(*) Solo con cingolo lungo in acciaio

DRAFT ⁹ **COPY**




Standard Crawler

1,4 m




Counterweight

1000 kg




Steel crawler closed

1,45 m (*)




Telescopic boom

4,5-11,0 m




Steel crawler open

2,05 m (*)




Telescopic boom rotation

360°




Outriggers setup

4,2x4,2 m




Telescopic boom rotation locked

0°



Working radius



Jib

-

NOTES:

The crane must operate on steady and flat surface when hoisting load. The load can be travelled only with the telescopic boom rotation locked. The load must be restrained from swinging, travel slowly and as close to the ground as possible. Do not operate the crane while carrying the load.